



### Features

The stable removable base is engineered for the physical demands of touch screen use. The sturdy design helps foster intuitive operator entry and flexibility with a variety of applications to help reduce training time and costs and operational errors and help increase employee productivity and customer satisfaction.


Mouse and keyboard free, use your fingers directly, easy to use for POS display, information board, industrial field, medical and transportation



250 nits brightness, 1024 X 768 resolution

Panel	Cell Type / Glass Surface		TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ratio / Size		4:3 / 15" viewable diagonal area
	Active Area / Pixel Pitch		304.13((H)x 228.10(V))mm / 0.297(H)x0.297(V)mm
	Native Resolution / Colors		1024(H)x768(V)/ 16.2 Million
	Brightness / Contrast		250 cd/m <sup>2</sup> (typ) / 700:1
	Response Time		≤ 35ms
	Viewing Angle		H.140°(-70°~+70°), V.120°(-60°~+60°)
	Light Source		CCFL, Long life, 50,000 hrs(typ)
Input Sources	PC System	Signal	Analog RGB (0.7/1.0 V <sub>p-p</sub> , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F <sub>h</sub> : 30 - 82Khz , F <sub>v</sub> : 50 - 75Hz
	Audio System		2W Speaker X 2
Input Terminals	1 X VGA (15pin Female D-sub), 1 X PC Audio (Stereo Headphone Jack), 1 X DC Power Plug)		
Convenient Feature	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages · Wall Mount Ready ( VESA 75x 75mm )		
Power	External AC to 12VDC power adapter with universal / Auto sensig, AC 90 to 260V, 50/ 60 Hz		
Power Consumption	Operation / Power Saving	20 watt, < 2 watt (Support DPMS)	
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F), 10% ~ 90% (no condensation)	
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F), 10% ~ 90% (no condensation)	
Certification	FCC , CE		
Dimensions	Physical	With Base : (W x H x D): 360 X 342.6 X 190mm	
		Without Base : (W x H x D) 360 x 300 x 52.9 mm	
	Carton	(W x H x D) 419 x 380 x 142 mm	
Weight	N.W. / G.W.	4.0 Kg / 5.0 Kgs	
Container Loaded	20ft / 40ft / 40ft HQ	TBD (Sets, By Pallet)	

### Options

Touch Panel	Resolution	Transparency	Linearity	Durability	Driver
Resistive touch	2048x2048	80%+/-3%	X ≤ 1.0%, Y ≤ 1.0%	35 Million Times	MS-OS, Linux, QNX
Capacitive touch	2048x2048	80%+/-2%	X ≤ 1.0%, Y ≤ 1.0%	200 Million Times	MS-OS, Linux, QNX

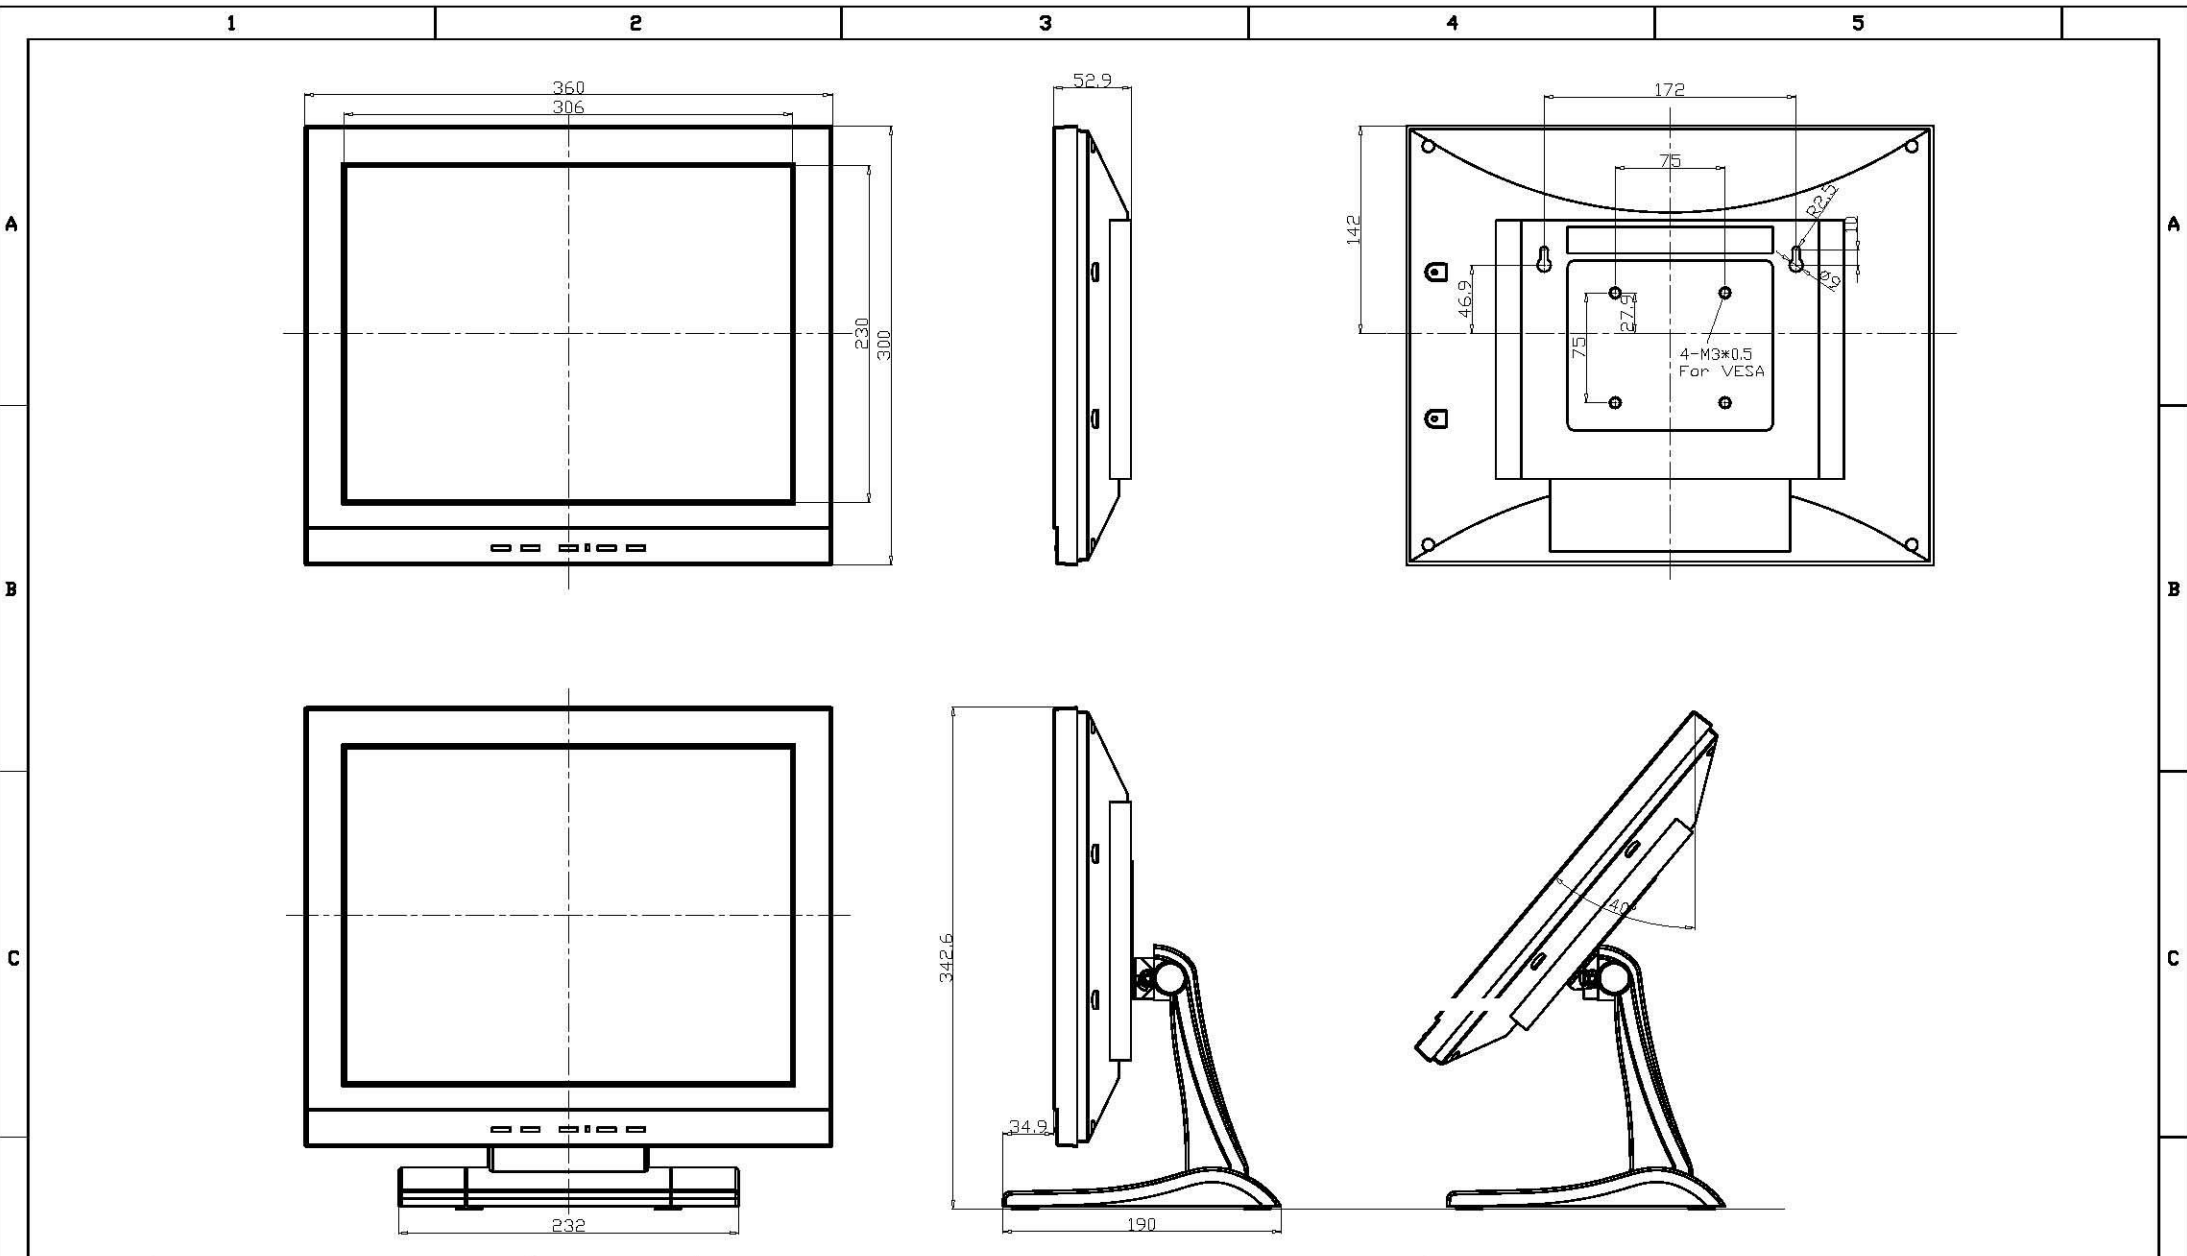

AD/BOARD		MODEL		3G-150Q		元祺科技股份有限公司 3G TECHNOLOGY INC.				
INVERTER		PART NO.				PART NAME		ASSEMBLY		 
KEY PAD		MATERIAL		SECC		APPROVED		DRAWN		JACK
PANEL:		DATE		10/31/2008		REV.		DWG		SIZE