



## Features

Modularize mechanical design provides flexible product configuration and easy maintenance

Optional ultra high brightness panel

Available with auto-brightness sensor offers application in day and night





Optional build-in touch screen for interactive application

Complete custom design/solution for OEM customers

Panel	Cell Type / Glass Surface		TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ration / Size		Wide / 21.5" viewable diagonal area
	Active Area / Rixel Pitch		476.64(H) x 268.11(V) mm / 0.2482(H) x 0.2482(V) mm
	Native Resolution / Colors		1920(H) x 1080(V) / 16.7 M
	Brignthess / Contrast		300 cd/m <sup>2</sup> (typ) / 1000:1
	Response Time		≤5ms
	Viewing Angle		H.170°(-85°~+85°), V.160°(-80°~+80°)
	Light Source		CCFL, Long life, 50,000 hrs(typ)
Input Sources	PC System	Signal	Analog RGB (0.7/1.0 V <sub>p-p</sub> , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F <sub>h</sub> : 30 - 82Khz , F <sub>v</sub> : 50 -75Hz
	Audio System	2W speaker x 2	
Input Terminals	1 x VGA (15pin Female D-Sub), 1 x PC Audio (Stereo Headphone Jack), 1 x AC Inlet		
Convenient Feature	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI,DDC 2B)		
	OSD Multi-Languages, Wall Mount Ready ( VESA 100x 100mm )		
Power	Internal power supply with universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz		
Power Consumption	Operation / Power Saving	26 watt , < 1 watt (Support DPMS)	
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)	
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F),10% ~ 90% (no condensation)	
Certification	FCC , CE		
Dimensions	Physical	With Flanges(W x H x D) :	
		532.0 x 334.0(screw center-to-center) x 63.0 (mm)	
	Carton	Without Flanges(W x H x D) : 532.0 x 318.0 x 63.0 (mm)	
Weight	N.W. / G.W.		6.5 Kgs / 7.5 Kgs

## Options

Touch Panel	Video / TV	Enhanced Panel	Others
Resistive touch	SV + AV	Panel with LED backlight	Digital Signage (stand alone)
Capacitive touch	SV + AV + AV Looping	High brightness panel	Networking Digital Signage
SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
Infrared touch		Sunlight Readable	Light Sensor
Protected Glass			Auto-Dimming

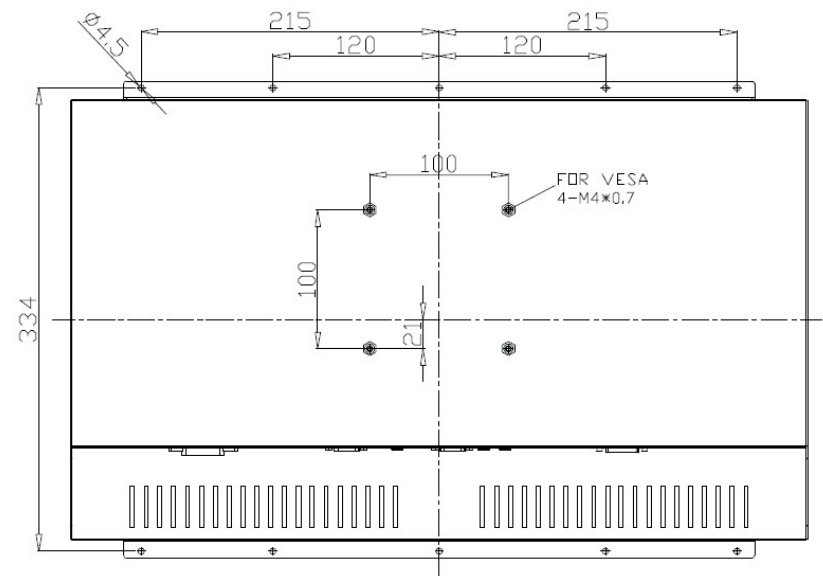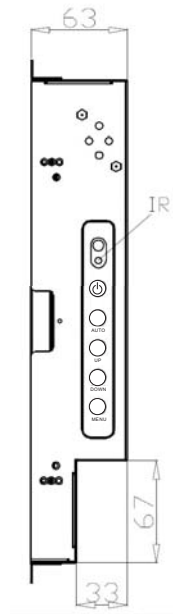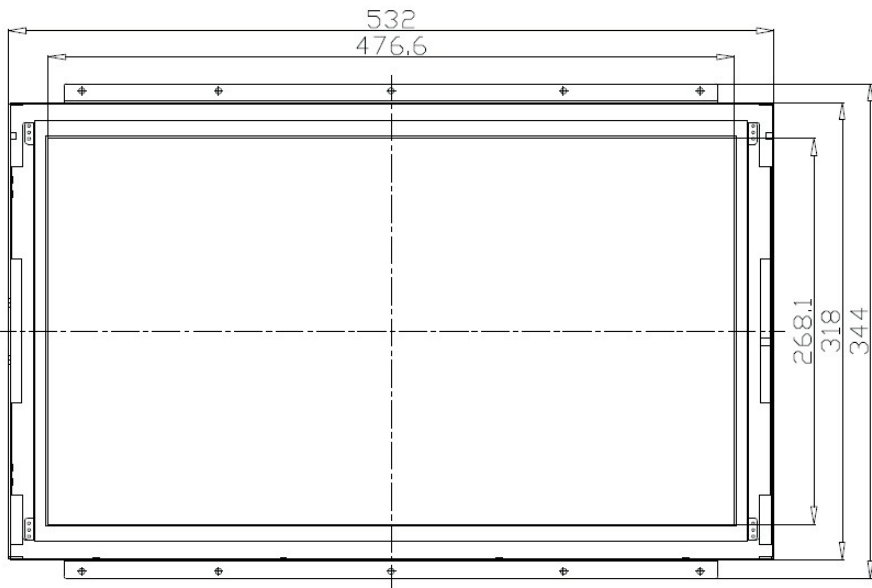

元祺科技股份有限公司  
3G TECHNOLOGY INC.

Model no:3G-OF215Q

DRAWING: QUEEN UNIT: mm